

**PRV**

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

PCT / SE 2004 / 0 01864

**Intyg  
Certificate**

*Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.*

*This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.*




(71) Sökande                      Anoto AB, Lund SE  
Applicant (s)

(21) Patentansökningsnummer    0303351-1  
Patent application number

(86) Ingivningsdatum                      2003-12-15  
Date of filing

Stockholm, 2004-12-21

*För Patent- och registreringsverket  
For the Patent- and Registration Office*

  
Görel Gustafsson

Avgift  
Fee

AWAPATENT AB

Kontor/Handläggare  
Helsingborg/Linus Grönlund/LGD

ANOTO AB

Ansökningsnr

Vår referens

SE-21006905

1

AN OPTICAL SYSTEM, AN ANALYSIS SYSTEM AND A MODULAR UNIT  
FOR AN ELECTRONIC PEN

Field of the Invention

The present invention relates to an optical system, which is arranged to irradiate an object and to transmit an image of the object to an image plane. The invention  
5 also relates to an analysis system including such an optical system, and to a modular unit for an electronic pen.

Background Art

10 In the ever increasing demands on mobility of society of today, it is popular to provide small and portable devices having imaging capability. The optical systems of the above type are thus implemented in handheld devices with imaging capability, such as  
15 handheld scanners and electronic pens. In order to restrict the overall size of such a handheld device including imaging capability, it is accordingly also advantageous to make the included optical system compact.

The optical system typically comprises an  
20 irradiating system including a radiation source for providing the irradiation of the object, and an imaging system including a two-dimensional radiation sensor for recording an image of the object. In order for the  
25 imaging system to adequately image an object, the entire part of the object viewed by the radiation sensor should preferably be at least essentially uniformly irradiated by means of the radiation source. For handheld devices, the spatial orientation between the optical system and the object, which typically is a plane surface, such as a  
30 paper, may vary substantially. For example, during the process of writing with an electronic pen, the pen will frequently be held at varying angles to the paper. Thus,

the spatial orientation of the paper also varies in relation to the radiation sensor and the radiation source. As the angle varies, the relation between the radiation sensor and the writing surface will be changed.

5 This sets demands on an imaging system to adequately image the viewed part of the object for different angles between the pen and the paper.

Further, demands are set on the radiation source to irradiate the object properly. These demands are  
10 accentuated when the radiation source and the radiation sensor are arranged at positions that relate to the object in different ways, such as being arranged at different distances to the object and forming different angles to the object. In these cases, the radiation  
15 source needs to emit radiation in a large solid angle in order to ensure that the viewed object area is irradiated irrespective of orientation changes between the handheld device and the object.

In WO 03/001358, an electronic pen is disclosed,  
20 wherein the problems of providing adequate imaging and irradiating in an electronic pen have been considered. However, the assembly of this electronic pen is not entirely satisfactory. Further, the electronic pen involves relatively long tolerance chains between the  
25 components of the radiation sensor and the radiation source, as well as an electrical coupling between the radiation sensor and the printed circuit board that may increase the manufacturing cost, decrease the durability of the pen, and introduce manual assembly steps in the  
30 production.

In WO 03/025658, an optical system is disclosed, wherein an optical component is used for enabling the irradiating system and the imaging system to share optical axis. Thus, irrespective of its orientation in  
35 relation to the object, the radiation source will irradiate the area of the object being imaged by the radiation sensor.

In US 5,939,702, an optical reader is disclosed, wherein an emitter and a photodiode are mounted on a circuit board and a light pipe is used for communicating light between an external device, such as a paper having optical data, and the emitter and the photodiode. This optical reader forms merely a pointing means and provides no possibility of optical detection while using a writing functionality. The optical reader images only one point at a time and requires scanning for obtaining further data. Moreover, the emitter and the photodiode uses the same light pipe, which may raise problems in the photodiode detecting light that comes directly from the emitter and has not interacted with the external device.

#### 15 Summary of Invention

It is a general object of the invention to provide an enhanced optical system.

It is a specific object of the invention to provide an optical system that is able to image an irradiated object with increased tolerance to varying orientations and distances between the optical system and the object. It is a further object of the invention to provide an optical system that may be implemented in a more compact size. It is also an object of the invention to at least partly relieve or solve the above-mentioned problems.

These and other objects of the invention that will appear from the following description are fully or at least partly achieved by an optical system according to claim 1, an analysis system according to claim 20, modular units according to claims 21 and 31, a sensor boresight unit according to claim 29, and an optical component according to claim 30. Embodiments of the invention are defined in the dependent claims.

According to one aspect of the invention, it relates to an optical system, which comprises an irradiating system which has an optical axis within said irradiating system and includes a radiation source, and an imaging

system which has an optical axis within said imaging system and includes a two-dimensional radiation sensor, said imaging system being arranged to provide an image of an object being irradiated by said irradiating system, wherein said radiation source and said two-dimensional radiation sensor are mounted on a common substrate, and wherein said optical axis of the irradiating system and said optical axis of the imaging system are non-coinciding within said systems.

10 The invention provides an optical system, wherein the radiation source and the two-dimensional radiation sensor are arranged in a well-defined spatial relationship to each other, which does not depend on several components. This enables a short tolerance chain for defining the possible variation of the relationship between the irradiated area and imaged area on the object. Thus, the tolerances of the design of components of a device and/or the tolerances of the assembly of the components need not be very harshly set, whereby the yield in serial production may be increased. Alternatively, the required solid angle to be irradiated may be reduced or the variation in orientation allowed in use between a device carrying the optical system and the object may be increased. This is possible, since the variation due to tolerances in the interrelationship between the irradiated area and the imaged area is reduced. Reducing the solid angle implies that the power fed to the radiation source may be reduced, whereby battery lifetime is increased.

30 The radiation source and the radiation sensor being mounted on a common substrate may be implemented by mounting the radiation source and the radiation sensor on a common printed circuit board. This enables cheap and simple connection of the source and the sensor to electronics for controlling their function and analysing the acquired image information.

An optical axis of a system forms a symmetry line for propagation of radiation in relation to the system. The optical axis extends within and between components of the system, and further extends beyond the components of the system to one or more objects imaged or irradiated by the system. In the context of the present application, the terms "optical axis within the irradiating system" and "optical axis within the imaging system" implies the optical axis as defined only within the components of the respective systems. Thus, these terms do not include the optical axis outside and beyond the components of the respective systems. Further, the definition that the optical axes are "non-coinciding within said systems" implies that the optical axes do not cross each other at any point within the systems.

The provision of non-coinciding optical axes of the irradiating system and the imaging system within the systems provides a possibility to optimize irradiating optics and imaging optics to their respective purpose. Further, the risk of leakage of radiation directly from the radiation source to the radiation sensor may be reduced.

As mentioned above, depending on the orientation between a device carrying the optical system and the object, different areas of the object will be imaged. At a certain orientation between the device and the object, a planar object may be arranged at the object plane of the imaging system. However, when the orientation is changed, the planar object will not lie in the object plane of the imaging system. The imaging system may still image the planar object by a depth of field of the imaging system allowing deviations from the object plane.

The irradiating system may be arranged to redirect radiation from the radiation source, and the imaging system may be arranged to redirect radiation from the irradiated object towards the radiation sensor. This implies that the radiation source and the radiation

sensor may be arranged on a substrate that extends in a direction substantially along a longitudinal axis of an elongate device, wherein the area to be imaged and irradiated is at a short end of the device. If the optical system is implemented in a handheld device, such as an electronic pen, the device mainly extends in this direction. Thus, this arrangement is suitable if the radiation source and the radiation sensor are to be mounted on e.g. a common printed circuit board in an electronic pen.

The optical axis within the irradiating system and the optical axis within the imaging system may run essentially in parallel to each other. This ensures that the optical axes will be non-coinciding within the systems. Further, optical components of the irradiating system and optical components of the imaging system may be arranged without interfering with each other.

The optical axis within the irradiating system and the optical axis within the imaging system may further run essentially parallel to the common substrate. Thus, the substrate will not interfere with the optical path of the irradiating and imaging systems.

Moreover, the optical axis within the irradiating system and the optical axis within the imaging system may define a plane which is essentially parallel to and at a distance from the common substrate. This implies that the optical axes of the irradiating system and the imaging system are arranged side by side over the common substrate. Thus, the height of the irradiating system and the imaging system over the common substrate may be minimized, since they need not be arranged on top of each other. As a result, the diameter of an electronic pen including the optical system is kept small.

The irradiating system may further comprise a radiation guide for guiding radiation from the radiation source towards the object. The radiation guide may guide the direction of emitted radiation from the radiation

source in order to direct it correctly towards the object. Further, there is a control of the emitted radiation, reducing the spreading of stray radiation. The radiation guide may comprise a mirror above the common  
5 substrate over the radiation source to provide the redirection of radiation from the radiation source.

The radiation guide may present non-exit surfaces at least part of which may be metallized. Thus, surfaces of the radiation guide not intended for output of radiation  
10 are metallized to prevent leakage of radiation. This further enhances control of stray radiation from the radiation source and enhances control of the distribution of the emitted radiation.

It should be noted that, as used herein, "stray  
15 radiation" implies either radiation that does not give the radiation sensor information on the imaged area, since it may not be related to an origin in this area, or radiation which has passed or leaked directly from the radiation source to the radiation detector without having  
20 interacted with the object to be imaged.

Further, the radiation guide may present an inclined radiation-redirecting exit surface. This implies that a normal axis of the exit surface is inclined to the optical axis within the irradiating system. This provides  
25 a redirection of the radiation emitted from the radiation source towards the object. Thus, the exit surface may be inclined so as to direct the emitted radiation to create an irradiated area that better corresponds to an imaged area at the object.

The radiation guide may also be mounted on the  
30 common substrate. This distinctly defines the position of the radiation guide of the irradiating system in relation to the radiation source, whereby the tolerance chain of the irradiating system is kept short. The tolerance of  
35 the irradiating system defines a deviation from a nominal position of the irradiated area on the object. Thus, keeping the tolerance chain short implies that a better

control is obtained for the set position of the irradiated area on the object.

The imaging system may further include a sensor boresight unit for controlling a spatial origin of radiation transmitted towards the radiation sensor. The sensor boresight unit thus controls the area viewed by the sensor. It will therefore define the boresight of the sensor. The sensor boresight unit of the imaging system is preferably a separate unit from the radiation guide of the irradiation system. The sensor boresight unit also provides control of stray radiation, preventing it from being detected by the radiation sensor.

The sensor boresight unit may also be attached to the common substrate. This defines the position of the sensor boresight unit of the imaging system in relation to the radiation sensor, whereby the tolerance chain of the imaging system is also kept short. The tolerance of the imaging system defines a deviation from a nominal position of the imaged area on the object. Thus, keeping the tolerance chain short implies that a better control is obtained for the set position of the imaged area on the object.

Further, where the sensor boresight unit and the radiation guide are both mounted on the common substrate, the spatial interrelationship of these parts may also be well-defined, whereby a short tolerance chain is obtained for the relationship between the imaging and the irradiating systems. This implies that the interrelationship between the imaged and irradiated areas on the object may be adequately controlled.

The sensor boresight unit may comprise a mirror for redirecting radiation from the object towards the radiation sensor. The mirror is suitably arranged over the substrate on which the radiation sensor is mounted and above the radiation sensor to reflect radiation from the object directly onto the radiation sensor.

The sensor boresight unit may further comprise a lens for creating an image of adequate image quality on an image plane of the radiation sensor. The lens provides focus of the object plane onto the radiation sensor. The depth of field of the imaging system is suitably arranged to view an object placed in or near the object plane such that a sufficient image quality may be obtained for allowed changes to the optical set-up causing the object to move away from the object plane.

10 The sensor boresight unit may comprise an optical component, which is arranged to transmit radiation towards the radiation sensor, wherein the optical component comprises a mirror for redirecting radiation from the object towards the radiation sensor, and a lens  
15 for creating an image of adequate image quality on an image plane of the radiation sensor. In this way, the sensor boresight unit comprises few components, whereby tolerance chains of the production of the optical system are shortened. Especially, no account need be taken to  
20 tolerances due to assembly of these components. This implies that the allowed variation in the interrelationship between the irradiated area and the imaged area due to tolerances in components is reduced. As mentioned above, reduced tolerance chains imply that  
25 the irradiated area may be reduced and, thus, that the power fed to the radiation source may be reduced. This also gives less problems with stray radiation since the emitted power is reduced.

30 The sensor boresight unit may further comprise an aperture stop, which is arranged in front of the optical component. The aperture stop provides blocking of radiation that will not be directly transmitted to the image plane by the optical component. This reduces influence by radiation not holding information on the  
35 imaged area. The aperture stop may be used for adjusting the depth of field of the imaging system. Decreasing the

size of an opening of the aperture stop will increase the depth of field of the imaging system.

The optical component presents outer surfaces at least part of which may be covered with a material arranged to reduce internal reflections in said outer surfaces. The cover material may have optical properties adapted to provide that the majority of radiation impinging the cover material from the inside of the optical component will not be reflected back into the optical component. Thus, the cover material may have a refraction index that is matched to the refraction index of the material of the optical component, whereby radiation incident on the cover material will be transmitted into the cover material. Additionally or alternatively, the cover material may provide absorption of radiation that impinges the walls from the inside of the component. This reduces stray radiation caused by internal reflections or scattering in the optical component. The cover material has suitably a large absorption coefficient for radiation wavelengths acquired by the sensor. Further, the cover material may also be selected to prevent radiation from entering the optical component through the cover material. For instance, this may be achieved by the cover material absorbing or reflecting the radiation impinging it from outside the optical component. This would provide an effective block for radiation incident upon the optical component through other surfaces than an entrance surface.

The optical component may be implemented as a solid optics component formed by a unitary body. The solid optics component may be formed of a plastic material, such as polymethylmethacrylate (PMMA), polycarbonate (PC), Zeonex®, polystyrene, nylon, or polysulfone.

The sensor boresight unit may alternatively comprise a housing, providing an internal channel, which is arranged to transmit radiation towards the radiation sensor, wherein a mirror for redirecting radiation from

the object towards the radiation sensor and a lens for creating an image of adequate image quality on an image plane of the radiation sensor are mounted in the housing. This implementation of the lens and the mirror implies  
5 that the imaging optics is constituted of separate conventional components, whereby manufacture and quality control is easily implemented. Further, the housing may be structured to be suited for attachment to the common substrate.

10 The sensor boresight unit may further comprise an aperture stop arranged in the housing. The aperture stop may be formed as a part of inside surfaces of the housing. In this way, the housing may hold all components of the imaging system controlling the radiation path  
15 towards the radiation sensor.

The housing presents inside surfaces at least part of which may be arranged to reduce specular reflection of radiation. The inside surfaces may comprise a material which absorbs radiation, and specifically absorbs  
20 radiation wavelengths that are acquired by the sensor. The inside surfaces of the housing may also or alternatively be rough or have an appropriate texture in order to avoid specular reflections. This reduces stray radiation to the radiation sensor caused by internal  
25 reflections or scattering in the housing.

According to another aspect of the invention, it relates to an analysis system, which comprises an optical system according to the invention, a printed circuit board implementing said common substrate, and an image  
30 processor for analysing image information received from the radiation sensor, wherein the optical system is supported by and the image processor is mounted on the printed circuit board.

35 The optical system being supported by the printed circuit board implies that the spatial positions of the components of the optical system are defined by their relation to the printed circuit board, even though each

component does not need to actually be mounted on or attached to the printed circuit board. For example, a sensor boresight unit of the optical system need not be attached to the printed circuit board. However, the radiation sensor and the radiation detector of the optical system should be mounted on the printed circuit board. The arrangement of the optical system being supported on a printed circuit board provides a well-defined spatial interrelationship of components of the optical system. Thus, a compact arrangement for the acquiring of images and the processing of the images is provided. Further, the analysis system readily provides control of the radiation source, which is mounted on the printed circuit board, and further provides simple and cheap connection of the radiation sensor to an image processor.

According to a further aspect of the invention, it relates to a modular unit for an electronic pen having a writing means, said modular unit comprising a carrier, and an analysis system according to the invention being mounted on the carrier, said carrier having means for receiving said writing means in order to position the writing means in relation to the analysis system within the electronic pen.

This arrangement of a modular unit provides a possibility to test the quality of the analysis system before the electronic pen is finally mounted inserting the modular unit into an outer shell of the electronic pen. Thus, defects in the analysis system may be detected at an earlier stage in the production, whereby fewer steps need be made for defective products. This speeds up and improves the production process.

Since the analysis system is mounted on the carrier and the carrier provides a means for receiving a writing means, the spatial relationship between the analysis system and the writing means is defined by the design of the carrier. This implies that the imaged area and the

irradiated area are accurately defined in relation to a pen point of the writing means in contact with the object. Further, the mutual mounting on the carrier of the analysis system and the writing means implies that  
 5 the modular unit provides a short tolerance chain of the relation of the imaged and irradiated areas to the pen point.

The term "modular unit" should be construed as a unit that may be assembled and which is not held together  
 10 by pieces that do not form part of the unit. In this case, the modular unit for the electronic pen forms an integral unit before final assembly of the electronic pen.

The modular unit suitably has a dimension allowing  
 15 the modular unit to be mounted inside the electronic pen. Thus, in the assembly of the electronic pen, the modular unit may in its entirety be mounted within the electronic pen.

The printed circuit board of the analysis system may  
 20 be mounted on the carrier for mounting the analysis system on the carrier. Thus, the position of the printed circuit board may be fixed by the carrier. This implies that the insertion of the modular unit into the outer shell of a pen need not comprise securing the position of  
 25 the printed circuit board in the shell.

The carrier may have an elongate shape which extends, when the modular unit is comprised in an electronic pen, in a longitudinal direction of the electronic pen. Hereby, the carrier may provide  
 30 possibility to fix the position of several components of the pen along the longitudinal shape of the pen.

The modular unit may further comprise a pressure sensor which is mounted on the carrier. The pressure sensor may detect when the writing means is pressed  
 35 against a writing surface. This detection may activate the optical system to irradiate and image the writing surface, which forms the object. The pressure sensor's

functionality may be obtained by components arranged integrated on the carrier or may, alternatively, be obtained by a pressure sensor unit that is mounted on the carrier.

5       The modular unit may also comprise means for forming attachment to an outer shell part of the electronic pen. Thus, the modular unit is prepared for installation in the pen shell. The means for forming attachment could be a hook or pin for engaging the outer shell part or a slot  
10 or recess for receiving a protrusion from the outer shell part.

Further, the modular unit may comprise a vibrator unit, which is mounted in the carrier. The vibrator unit may by vibration provide feedback to the user e.g. when  
15 the electronic pen fails to appropriately image the writing surface.

Moreover, the modular unit may comprise a wavelength filter mounted on the carrier. The wavelength filter may be arranged such that the radiation from the object  
20 passes the wavelength filter before being detected by the radiation sensor. Thus, undesired wavelengths for the analysis to be performed by the analysis system may be filtered out.

According to a still further aspect of the  
25 invention, it relates to a modular unit for an electronic pen having a writing means, said modular unit comprising a carrier; a printed circuit board, which is mounted on the carrier; and an optical system, which is mounted on the carrier, said optical system comprising an  
30 irradiating system including a radiation source and an imaging system including a two-dimensional radiation sensor, the imaging system being arranged to provide an image of an object irradiated by said irradiating system; wherein said carrier has means for receiving said writing  
35 means in order to position the writing means in relation to the optical system within the electronic pen.

According to this aspect of the invention, there is provided a well-defined spatial relationship between the optical system and a writing means of the electronic pen, since the optical system is mounted on the carrier and  
 5 the carrier provides a means for receiving a writing means. The design of the carrier defines this spatial relationship.

According to an embodiment of this modular unit, the imaging system comprises a sensor boresight unit for  
 10 controlling a spatial origin of radiation transmitted towards the radiation sensor.

The sensor boresight unit may be supported by the printed circuit board. Thus, the printed circuit board may define the position of the sensor boresight unit.  
 15 However, the sensor boresight unit need not be actually mounted or attached to the printed circuit board. The sensor boresight unit may, for example, be attached directly to the carrier while being supported by the printed circuit board. Since the printed circuit board  
 20 defines the position of the sensor boresight unit, a short tolerance chain of the spatial relation between the sensor boresight unit and the radiation sensor is obtained.

The radiation source of the irradiating system may  
 25 be carried by the sensor boresight unit of the imaging system. This provides that the radiation source is kept in a close relationship to the imaging system, whereby the effects of the pen orientation on the interrelationship between the imaged and irradiated areas  
 30 on the writing surface is minimized. The radiation source may, for example, be arranged in a holder that is attached to the outside of the sensor boresight unit.

According to still another aspect of the invention, it relates to a sensor boresight unit for transmitting  
 35 radiation from an object to a radiation sensor, said sensor boresight unit comprising a housing, which provides an internal channel that changes direction at a

turn within said housing and further provides a radiation entrance end and a radiation exit end of said channel, a lens, which is mounted in the internal channel at said radiation entrance end of said housing, and a mirror, which is mounted in the housing at said turn of the internal channel for redirecting radiation along the change of direction of the internal channel.

According to yet another aspect of the invention, it relates to an optical component for transmitting radiation from an object to a radiation sensor, said optical component being formed by a solid body defining a radiation path within the body, said solid body comprising a radiation entrance surface for receiving radiation into said radiation path, said entrance surface being curved for forming a lens, a radiation exit surface, a tubular part for transmitting radiation in the radiation path along a longitudinal axis of the tubular part, and a mirror surface at an end of the tubular part opposite the entrance surface, wherein a normal of the mirror surface is slanted to the longitudinal axis of the tubular part such that the radiation path is redirected in the mirror surface towards the radiation exit surface of the solid body.

Both these last-mentioned aspects of the invention respectively provide devices for transmitting of radiation from an object to a radiation sensor. This transmitting of radiation may advantageously be used in an imaging system for collecting radiation from the object and redirecting the radiation towards a radiation sensor. Thus, these devices respectively enable positioning of the radiation sensor more freely in relation to the object to be imaged by the radiation sensor.

#### Brief Description of the Drawings

The invention will now be described in further detail with reference to the accompanying schematic

drawings, which by way of example only illustrate presently preferred embodiments of the invention.

5 Figs 1a and 1b illustrate angles defining an orientation of an electronic pen in relation to a writing surface.

Fig. 2 illustrates relations between contact point, imaged area and irradiated area for an optical system of the electronic pen.

Fig. 3 is a side view of the electronic pen.

10 Fig. 4 is a perspective view of a modular unit in an electronic pen, where the outer shell of the pen has been removed.

Fig. 5 is a perspective view of components of a modular unit for the electronic pen before being  
15 assembled.

Fig. 6 is a perspective view of the components of the modular unit of Fig. 5 after being assembled.

Fig. 7 is a side view of an ink cartridge and illustrates the effect of a radial gap between the ink  
20 cartridge and a receiving bore of the pen.

Fig. 8 is a perspective view of an analysis system comprising an optical system and a processor.

Fig. 9 is a side view of an imaging system of the optical system.

25 Fig. 10 is a sectional view of an embodiment of the imaging system.

Fig. 11 is a sectional view of another embodiment of the imaging system.

30 Fig. 12 is a side view of an embodiment of an irradiating system of the optical system.

#### Detailed Description of Embodiments of the Invention

Referring now to Figs 1-4, the parts and components of an electronic pen and the functionality of the pen  
35 will initially be summarily described. Although the invention is not restricted to its use in an electronic pen, an embodiment of the invention as used in an

electronic pen will illustrate the features and functionality that may be obtained by the invention according to at least some aspects.

The basic properties of an electronic pen 1 will initially be described. In Figs 1a-b, an ink cartridge 8 of an electronic pen 1 is shown. The ink cartridge 8 comprises a pen point 9, which will contact a writing surface 14, when a user is writing. The writing surface 14 comprises a pattern, which carries information on the writing surface 14. The pattern may encode a position on the writing surface 14 or general information regarding what the writing pertains to. This may be used for calculating the movement of the pen point 9 and/or for registering if writing is made in a special area on a paper, such as a check box or a date in a calendar. In order to decode the pattern on the writing surface, the pen 1 comprises an imaging system 15 (Fig. 4) for imaging an area on the writing surface 14. Using the imaged area, the pen 1 may determine the position of the pen point 9 on the writing surface 14. The imaging system 15 comprises a focussing lens for obtaining a sufficiently sharp image of the imaged area. Further, in order for the imaging system 15 to adequately image the area on the writing surface 14, this area should be irradiated by a radiation source.

When a user writes, the orientation of the ink cartridge 8 in relation to the writing surface 14 will vary. Ideally, an area centred around the pen point 9 should be imaged, to minimize any variations in the relation between the imaged area and the pen point 9 resulting from the varying pen orientation. However, this is difficult to achieve, since the optical axis of the imaging system 15 would then have to be placed coinciding with the longitudinal axis of the ink cartridge 8. Further, the ink cartridge 8 and the pen point 9 may then obscure the imaged area. Thus, the imaging system 15 is arranged to image an area adjacent to the pen point 9.

This implies that the relation between the imaged area and the pen point 9 will depend on the orientation between the ink cartridge 8 and the writing surface 14, as will be explained below.

5 In Figs 1a-b, the orientation between the ink cartridge 8 and the writing surface 14 is illustrated. This orientation may be described by using three angles. As shown in Fig. 1a, the ink cartridge 8 forms an inclination angle  $\theta$ , which is defined as the tilt angle  
10 between the ink cartridge 8 and the normal of the writing surface 14. The inclination angle  $\theta$  may vary substantially during writing. Further, as shown in Fig. 1a, the pen 1 may be rotated around the longitudinal axis of the ink cartridge 8. Since the imaging system 15 is  
15 not arranged on this axis, such a rotation will affect the relation between an imaged area and the pen point 9. The rotation of the pen 1 around the longitudinal axis of the ink cartridge 8 is called a skew angle  $\phi$ . Moreover, as shown in Fig. 1b, the pen 1 may be rotated in relation  
20 to the pattern on the writing surface 14. This rotation around the normal of the writing surface 14 is called a pattern rotation angle  $\alpha$ .

Referring now to Fig. 2, the effects of differing inclination angle  $\theta$  between the ink cartridge 8 and the  
25 writing surface 14 is illustrated. Three different writing surfaces  $WS_0$ ,  $WS_{-45}$ ,  $WS_{45}$  are shown to illustrate differinFel! **Objekt kan inte skapas genom redigering av fältkoder.** inclination angles, namely  $\theta=0^\circ$ ,  $\theta=-45^\circ$ , and  $\theta=45^\circ$ , respectively, between the ink cartridge 8 and the  
30 writing surface 14. As shown in Fig. 2, the writing surface 14 is arranged at different positions along an optical axis C of the imaging system depending on the inclination angle  $\theta$ . Thus, the distance between a radiation sensor of the imaging system 15 (Fig. 4) and  
35 the imaged area on the writing surface 14 will also depend on the inclination angle  $\theta$ . The inclination angles  $\theta$  that are allowed during writing define a range of

distances between the imaged area and the radiation sensor, at which the radiation sensor should detect the imaged area with an adequate sharpness over relevant parts of the imaged area for decoding the pattern on the writing surface 14. This range of distances is called the depth of field requirement FD of the imaging system 15. As seen in Fig. 2, this necessary depth of field FD is proportional to the distance D in a reference plane, which in this case is the plane of the writing surface at inclination angle  $\theta=0$ , between the contact point P, i.e. the pen point 9, and the optical axis C of the imaging system 15. In order to provide a large depth of field, the imaging system 15 should have a low f-number, whereby low amounts of radiation are passed to the radiation sensor. For this reason, it is desired that this optical axis offset or distance D is designed as small as possible for the arrangement of the imaging system 15 in the pen 1.

The imaging system 15 images an area on the writing surface 14, which is the field of view of the imaging system 15. Since the magnification of an object onto an image plane in the radiation sensor is inversely proportional to the distance between the object and the lens of the imaging system 15, the magnification of the field of view will increase with increasing inclination angle  $\theta$  between the ink cartridge 8 and the writing surface 14. The field of view that is imaged onto an active area on the radiation sensor is smaller at a larger magnification. The imaging system 15 should image an area on the writing surface 14 which holds sufficient amounts of information for decoding a pattern on the writing surface 14. The field of view should therefore be large enough to allow imaging of a decoding area DA. Thus, an upper limit of the magnification is set in order for the field of view to include a decoding area DA. Further, a lower limit of the magnification is set in order to enable discrimination of the smallest details of

the pattern. Also, by keeping the necessary depth of field FD as small as possible, the variation in the magnification of the imaged area is minimized.

However, to keep the necessary depth of field FD as small as possible, the field of view should be arranged next to the tip of the ink cartridge 8. Thus, there is a risk that the field of view becomes partly obscured by the tip of the ink cartridge 8. If the ink cartridge 8 obscures a large part of the field of view, the imaged area of the writing surface 14 may not be large enough to enable decoding of the pattern. This implies that the distance D should not be designed too small. If an angle between the optical axis C and the longitudinal axis A of the ink cartridge 8 is increased while keeping the distance D constant, the obscuration of the tip of the ink cartridge 8 in the field of view may be reduced. However, a greater angle also implies that the optical axis C is further apart from the longitudinal axis of the ink cartridge 8 inside the pen 1, resulting in a larger radius of the pen 1.

As briefly mentioned above, at least the relevant parts of the imaged area, i.e. the decoding area DA holding the pattern to be decoded, should be irradiated. This may easily be ensured, if an optical axis I of an irradiating system 13 is arranged coincident with the optical axis C of the imaging system 15. However, if the optical axes C, I of the imaging and irradiating systems 15, 13 are arranged to coincide, optical components on the coinciding optical axes need to be adapted to perform functions of both the imaging and irradiating systems 15, 13. This may result in loss of radiation in the optical components. On the other hand, if the optical axes C, I are arranged not to coincide, the relation between the imaged area and the irradiated area will depend on the angles between the ink cartridge 8 and the writing surface 14. Then, the design of the pen needs to arrange the irradiating system 13 such that the irradiated area

always includes the relevant parts of the imaged area for all allowed angles between the ink cartridge 8 and the writing surface 14. The irradiating system 13 should irradiate the decoding area DA properly, for example with  
 5 sufficiently uniform radiation of a sufficient magnitude (irradiance). The uniformity may be defined by the largest difference in irradiance and/or the irradiance gradients within the decoding area DA.

The accumulated decoding areas DA for all allowed  
 10 angles between the ink cartridge 8 and the writing surface 14 define a space that is to be irradiated. As illustrated above, this space depends on the design of the pen 1, i.e. on the distance D, the decoding area DA, the angle between the optical axis C and the longitudinal  
 15 axis of the ink cartridge 8 and the allowed angles between the ink cartridge 8 and the writing surface 14. Thus, the irradiating system 13 should be arranged to emit radiation in such a large solid angle  $\gamma$  that it covers the space to be irradiated. Placing the optical  
 20 axis I of the irradiating system 13 close to the optical axis C of the imaging system 15 implies that the required solid angle  $\gamma$  is kept relatively small. The properties of the irradiating system 13 needed for obtaining the required solid angle  $\gamma$  could be designed by calculating  
 25 the irradiation pattern using a ray-tracing program.

Above, the effects of differing inclination angles  $\theta$  have been explained. Further, differing skew angles affect the requirements on depth of field FD and the irradiated space. Again, increasing the distance D  
 30 implies that a larger depth of field FD and a greater irradiated space are needed when varying skew angles are allowed.

When the pattern rotation angle  $\alpha$  is changed, the encoded pattern viewed by the imaging system 15 will be  
 35 changed. This needs to be accounted for in calculation of the position of the pen point 9 on the writing surface 14. Where the needed information for decoding the encoded

pattern is defined by a square, allowing all pattern rotation angles  $\alpha$  implies that the required size of the imaged area of the writing surface is defined by a circle formed by rotating the square pattern. However, varying  
 5 the pattern rotation angle  $\alpha$  will not affect the size of the area being imaged, the distance of the imaged area to the radiation sensor or the distance D.

The pen 1 is designed with nominal parameters, such as sizes and relative mounting angles and distances, on  
 10 all components of the pen 1. This design gives a nominal value of the distance D. However, in manufacturing the pen 1 tolerances to the nominal parameters should be allowed. Tolerance chains add up to set requirements on allowed largest value of the distance D. This largest  
 15 value sets the requirement on the depth of field FD of the imaging system 15. Further, tolerance chains add up to define possible needed irradiated spaces.

In designing the pen 1, the above-explained parameters of the imaging and irradiating systems 15, 13  
 20 should be considered. If the nominal distance D between the pen point 9 and the optical axis C of the imaging system 15 in the reference plane is decreased, the nominal depth of field FD may be reduced. This implies that an opening of an aperture stop in the imaging system  
 25 15 may be increased allowing more radiation to reach the radiation sensor. Thus, the power of the radiation source may be reduced, whereby battery lifetime of the pen 1 is increased. The decreased distance D may alternatively be used to allow the pattern on the writing surface 14 to  
 30 comprise smaller details, while the imaging system 15 is unchanged. The decrease in the nominal distance D may as a further alternative be used for allowing larger differences in the angles between the ink cartridge 8 and the writing surface 14, while keeping the nominal depth  
 35 of field FD constant. Further, the decrease in the nominal distance D may be used for allowing larger

tolerances in individual components of the pen 1 or in the assembly of the components.

These parameters, i.e. the nominal distance  $D$ , the nominal depth of field  $FD$ , the scale of the details on the writing surface 14, the allowed variation in the angles between the ink cartridge 8 and the writing surface 14, and the allowed tolerances may be varied in several different ways, wherein an increased requirement of one parameter may cause increased requirements of one or more of the other parameters.

With insufficient control of the tolerance chains, the distance  $D$  may thus for some pens be so great that the imaging system 15 is not capable of supplying useful images to the processor 16 (Fig. 4). This may be solved by constructing the imaging system 15 with a great nominal depth of field by decreasing the opening of an aperture stop and/or decreasing the focal length of an imaging lens. This, however, may cause an undesirable restriction on the amount of radiation that can be transferred to the radiation sensor.

As is apparent from the above, the imaging and irradiating systems 15, 13 in a pen 1 have some parameters that are closely related and set different requirements to the systems. When designing the systems, the choice of a parameter implies that all other parameters are affected as described above. Thus, the design should be accurately and carefully developed in order to meet the requirements.

The presently preferred embodiments are designed to handle decoding areas  $DA$  of approximately 3-5 mm. The distance  $D$  is suitably set in the range of about 2-4 mm, and the necessary depth of field is suitably set in the range of about 2.5-10 mm, preferably in the range of about 4-8 mm, and most preferably in the range of about 6.5-7.5 mm. Preferably, the optical system is designed to allow for a symmetric range of inclination angles  $\theta$ , for all skew angles  $\phi$ , so as to allow the user to grip and

write with the pen at any skew angle. Preferably, the range of allowable inclination angles comprises about  $\pm 30^\circ$ , and preferably about  $\pm 40^\circ$ . Preferably, the imaging system is designed with a length of the optical axis C, from the writing surface to the radiation sensor at  $\theta=0^\circ$  and  $\phi=0^\circ$ , in the range of about 15-60 mm, preferably about 30-45 mm. At the lower limit, the imaging system may require an undesirably small aperture stop and exhibit significant image distortion. At the upper limit, the imaging system may take up significant longitudinal and radial space in the pen and/or require an optically redirecting element at the front end of the pen.

Below, some embodiments of imaging and irradiating systems within a pen 1 will be described, further illustrating ways of designing the pen 1 to at least satisfactorily meet the above-mentioned requirements.

The pen 1 in Fig. 3 has a body 2 with a forward portion 2a and a cap 3 with a clip 4. A carrier 5 is arranged mainly inside a casing 6 of the pen 1, as illustrated in Fig. 4. The carrier 5 constitutes part of the interior of the pen 1 and extends in the longitudinal direction of the pen 1 towards a rear portion 7 of the pen 1. An ink cartridge 8 with a pen point 9 is inserted into a receiver 10 in the carrier 5, as illustrated in Figs 5-6. The receiver 10 provides a through bore 10a in the forward part 2a of the pen 1 and an extension of the through bore 10a into a longitudinal groove 10b. The ink cartridge 8 is slid into the receiver 10 and may be replaced by a user. Between the ink cartridge 8 and the receiver 10 there is a certain radial play. An optical system 11 is attached to a printed circuit board 12, which is mounted on the carrier 5. The optical system 11 comprises an irradiating system 13 for emitting and directing emitted radiation towards an object, which is typically a writing surface 14, such as a paper, on which the user writes using the pen 1. The optical system 11 further comprises an imaging system 15 for collecting and

detecting radiation from the object in order to record images of the object. The recorded images are transferred to an image processor in the form of a processor 16 on a printed circuit board 12 and analysed therein.

5       The pen 1 comprises a means for providing power to the processor 16, the optical system 11 and any other parts of the pen 1 that need electric power. The means for providing power may be a battery 21 or a flexible cord (not shown) for connection to an external source of  
10 power. The pen 1 may further comprise a means (not shown) for enabling connection to an external computer unit for transfer of recorded images or information from the processor 16. The means for enabling connection to an external computer unit may be a wireless  
15 transmitter/receiver, a cradle connector or any kind of wire connection, such as a USB-connector.

When the pen 1 is not used, the cap 3 is normally arranged on the forward portion 2a of the pen 1 and then protects the pen point 9 and other components in the  
20 forward portion 2a of the pen 1. The clip 4 can then be used to fix the pen 1, for instance, in a shirt pocket. When the pen 1 is to be used, the cap 3 is removed and the pen 1 is set in a standby mode, wherein the pen 1 is sensible for actions that should activate the pen 1.

25       The pen 1 further comprises a pressure sensor arrangement 17, which is mounted in a pressure sensor receiving pocket 18 on the carrier. The pressure sensor arrangement 17 is installed at the end of the groove 10b of the receiver 10. The pressure sensor arrangement 17  
30 receives a rear end of the ink cartridge 8, when inserted into the receiver 10. When the pen point 9 is pressed against a writing surface 14, the ink cartridge 8 will be pressed towards a pressure sensor 19 attached to a wall of the pocket 18. The pressure sensor 19 will sense the  
35 exerted pressure. The sensing of a sufficient pressure by means of the pressure sensor 19 is used to fully activate the controlling electronics, such as the processor 16,

and thereby also activating the irradiating system 13, the imaging system 15, etc. Further, the amount of pressure may be determined and associated to the corresponding image recorded at the same time. The amount of pressure may then be used for illustrating the thickness of the strokes drawn with the pen 1.

In the embodiment of Figs 5-6, the rear end portion of the ink cartridge 8 is inserted and press fitted into an insert 22, which is movably arranged in the pressure sensor receiving pocket 18. The pressure sensor 19 is attached to a wall in the space defined by the pocket 18. The space is defined so that the insert 22 can move towards and away from the pressure sensor 19, but simultaneously so that the insert 22 cannot move out of the pocket 18. The insert 22 is designed in such manner that it can hold various makes of similar ink cartridges, which makes it possible to use exchangeable ink cartridges for ordinary ball point pens. The insert 22 ensures good contact with the pressure sensor 19 when the pen point 9 of the ink cartridge 8 is pressed against the writing surface 14 and reduces the risk of ink possibly leaking out damaging the pressure sensor 19. The design of the pocket 18 causes the insert 22 to stay in the right place when an ink cartridge 8 is removed from the pen 1 to be exchanged. The radial play between the ink cartridge 8 and the receiver 10 ensures that the ink cartridge 8 can be removed from the pen 1 with minor resistance only. When mounting a new ink cartridge 8, the receiver 10 ensures that the ink cartridge 8 is correctly positioned in the interior of the pen 1.

It is conceivable to essentially eliminate the radial play between the cartridge 8 and the receiver 10, in order to tighten the relationship between the pen point 9 and the imaging system 15. However, since the pen point 9 generally has a non-zero radial extension, the part of the pen point 9 being in actual contact with the writing surface 14 will vary with the inclination angle

and the skew angle of the pen 1. This causes an inaccuracy in the determination of the pen point location on the writing surface 14. A ballpoint pen typically has a pen point (roller ball) with a diameter of about 0.5 mm. For inclination angles of  $\pm 45^\circ$ , the above inaccuracy is about 0.35 mm, which is large enough to be visible if the handwriting is reproduced against a ruled background that represents the writing surface. It is possible to calculate a compensation value to minimize this inaccuracy, if the geometry of the pen point 9 is known, as well as the instant inclination and skew angles. However, it has been found that these inaccuracies instead can be lowered by careful design of the total radial play. Fig. 7 shows the ink cartridge 8 at two extreme inclinations:  $+45^\circ$  (solid lines) and  $-45^\circ$  (dashed lines). As can be seen, the actual contact point remains essentially constant. This may be achieved by the size of a radial gap RG being set equal to the effective diameter of the area that is defined by the location of the contact point on the pen point 9, at the extreme pen inclination angles for a zero radial play embodiment, as projected onto a plane perpendicular to the longitudinal axis of the ink cartridge 8. In practice, the radial gap RG is set to about 40-90% of the effective diameter, to take into account that the pen point 9 generally sinks into the writing surface 14 during writing.

The mounting of the pressure sensor arrangement 17 in the pocket 18 (Figs 4-5), which has a well-defined position on the carrier 5, minimises risk of misalignment of the ink cartridge 8 and the pressure sensor arrangement 17. Such misalignment may interfere with the axial motion of the ink cartridge 8, so that an arbitrary delay is introduced in the pressure sensor's detection of the pen's contact with the writing surface. Furthermore, such misalignment may cause wear on the insert 22 and/or the pressure sensor 19. The mounting of the pressure

sensor arrangement 17 on the carrier 5 may also reduce the pen's susceptibility to mechanical shocks.

The carrier 5 may also be effective in protecting the electronic circuits of the pen against electrostatic discharge (ESD), in the form of overvoltage discharges or sparks over small insulating gaps, e.g. air gaps, between conductive members in the pen 1. ESD may cause serious damage to the electronic circuits and/or latchup thereof. The problem of ESD may be enhanced in electronic pens, since electrical charge may travel into or out of the pen 1 via the ink cartridge 8, which is often made of metal. In the embodiment of Figs 4-6, all such small gaps between the cartridge/pressure sensor and the PCB are effectively eliminated by the receiver 10 and the pocket 18 being located on one side of carrier 5, and the electronic circuitry (PCB 12, processor 16, etc) being located on an opposite side of the carrier 5. The carrier material is continuous, i.e. there are no through holes, at least not in the surfaces defining the receiver 10 and pocket 18.

Further, mounting the pressure sensor arrangement 17 on the carrier 5 provides the possibility of testing this functionality of the pen 1 before the pen 1 is finally assembled. Thus, the final assembly need not be made if defects are detected to the functionality of the pen 1.

It should also be appreciated that other types of sensors may be used to activate the pen 1 when the pen point 9 is pressed against a writing surface 14. For instance, part of an open electric circuit (not shown) may be arranged in the position of the pressure sensor 19. In this case, the insert 22 is provided with conductive pins or a conductive sheet which, as the pen point 9 is being pressed against the writing surface 14, contacts and closes the electric circuit. Alternatively, an optical or magnetic detector can be used to sense the motion of the ink cartridge 8. In WO 03/69547, a thorough description of a pressure sensor is given. The aspects of

the pressure sensor described in WO 03/69547 may also be used in connection with the present invention.

The pen 1 further comprises a vibrator 20, which is attached to a rear end wall of the carrier 5. The vibrator 20 is connected to control equipment on the printed circuit board 12. The vibrator 20 may vibrate for giving feedback to the user. Thus, for instance, when the pen 1 has detected that the user has ticked a checkbox, the vibrator 20 may vibrate for signalling to the user that the pen 1 has correctly detected that the checkbox was ticked. Further, when the pen 1 detects an error, the vibrator 20 may vibrate continuously. Such an error may be when the pen 1 does not recognize a pattern on the writing surface 14 which it expects to recognize or when any other error occurs in the pen 1.

The carrier 5 and the parts mounted on the carrier 5, such as the printed circuit board 12, the optical system 11, the pressure sensor arrangement 17, the vibrator 20, and the ink cartridge 8 form a modular unit for the pen 1. This modular unit can be tested for functionality and resistance to certain outer conditions without the need for final assembly of the pen 1. This provides that defective modular units may be discarded or corrected before final assembly of the pen 1. Further, the arrangement of all these parts in one modular unit provides the possibility that the modular unit is delivered by a subcontractor to a pen manufacturer or pen dealer. The pen manufacturer/dealer need then merely package the modular unit with a battery and any other desired or needed parts in an outer shell before marketing the pen 1. It may also be conceivable that the battery forms a part of the modular unit. In either case, the modular unit provides the basic functionality of the pen 1.

When a user writes with the activated pen 1, an area on the writing surface 14 adjacent or around the pen point 9 is irradiated by the irradiating system 13 of the

optical system 11. The imaging system 15 of the optical system 11 records images of an irradiated area of the writing surface 14 adjacent the pen point 9, and the processor 16 calculates the position of the pen 1 based on the images. Here, a specific pattern (not shown) on the writing surface 14 may be used, for instance of the type as described in WO 00/73983, WO 01/26033, WO 01/71653, WO 03/042912, US 5,477,012 and US 6,330,976. With the aid of the pattern on the writing surface 14, the position of the pen 1 can at any moment be determined, and in this way the user's writing can be recorded.

In order to achieve good image quality, the area imaged by the imaging system 15 needs to be properly irradiated by the irradiating system 13. This is achieved, as explained above, by the irradiating system 13 emitting radiation in a solid angle  $\gamma$  that covers a space formed by the possible positions of the imaged area dependent on e.g. the angles between the pen 1 and the writing surface 14 and the tolerances in the components of the pen 1.

Referring now to Figs 8-12, an analysis system will be described. The entire analysis system is shown in Fig. 8, whereas parts of the analysis system are shown in detail in Figs 9-12. The analysis system comprises the printed circuit board 12, on which the processor 16 is arranged and on which the optical system 11 is mounted. The analysis system may be used for irradiating an object and imaging the irradiated object. The recorded images may be analysed in the processor 16, which is connected to the imaging system 15 on the printed circuit board 12. Thus, the analysis system provides an analysis functionality, which may be used in differing optical analysis applications. The analysis system is particularly suitable for use in handheld devices, wherein an object is to be analysed using images of the irradiated object. The analysis system will below be

described in relation to the application of the analysis system in an electronic pen, but it should be emphasized that the scope of protection of the present application is in no way limited to this use of the analysis system.  
 5 It may, for instance, be applied in a bar code reader instead.

The analysis may be achieved in each specific application by programming the processor 16 to perform image analysis. The image processor 16 may perform pre-  
 10 processing of the images, whereas an external computer unit extracts information from the images and calculates coordinates on the writing surface 14. Preferably, the image processor 16 performs all processing on the information in the images. Alternatively, all or parts of  
 15 the image processor 16 may be integrated in the radiation sensor 24. As a further alternative, the image processor 16 may be implemented as an application-specific integrated circuit.

The analysis performed is highly dependent on the  
 20 application of the analysis system and the needed information from the recorded images. Therefore, in the following description, referring now to Figs 9-12, the optical system 11 of the analysis system will be described in detail, whereas the function of the  
 25 processor 16 will be only briefly discussed.

The optical system 11 comprises an irradiating system 13 for irradiating the object to be analysed and an imaging system 15 for imaging the object. As shown in Fig. 8, the irradiating system 13 and the imaging system  
 30 15 are arranged adjacent to each other. Thus, the effect of varying angles between the pen point 9 and the writing surface 14 on the relationship between the irradiated area and the imaged area is kept low.

The optical system 11 may, as shown in Fig. 8, be  
 35 mounted on the printed circuit board 12. This is a rigid and simple assembly of the optical system 11.

Referring now to Fig 9, the imaging system 15 will be schematically described. The imaging system 15 comprises a two-dimensional radiation sensor 24. The two-dimensional radiation sensor 24 may be an electrooptical image sensor, such as a CCD or a CMOS sensor. The radiation sensor 24 may be arranged in a package 25 that is soldered to the printed circuit board 12. Alternatively, a sensor chip may be attached directly to the printed circuit board 12, for example via wedge or ball bonding. The radiation sensor 24 is connected through the printed circuit board 12 to the image processor 16 for analysing the images.

The imaging system 15 further comprises a sensor boresight unit 26 for directing radiation onto the radiation sensor 24. In the embodiment of Fig. 9, the sensor boresight unit 26 is mounted on the printed circuit board 12 around the radiation sensor 24. The sensor boresight unit 26 has a sensor pocket 27 to receive the package 25 with the radiation sensor 24. Thus, all radiation that reaches the radiation sensor 24 needs to propagate through the sensor boresight unit 26. The sensor boresight unit 26 comprises a mirror 28, which is arranged above the radiation sensor 24. The mirror 28 is arranged to reflect radiation from the writing surface 14 onto the radiation sensor 24, to redirect the optical axis of the imaging system 15 accordingly. The mirror 28 should have a surface that is sufficiently large to reflect radiation that covers the active area of the radiation sensor. In order to account for tolerances due to assembly, the mirror 28 may have a larger surface than the active area of the radiation sensor 24. The mirror surface 24 need not be planar, but a slightly curved mirror surface 24 is also conceivable.

The redirection of radiation in the mirror 28 implies that the radiation sensor 24 may be mounted on the printed circuit board 12, which extends in a direction substantially perpendicular to the writing

surface 14. The radiation is redirected essentially  $90^\circ$  in the mirror 28, so that the optical axis of the imaging system 15 in the optical path in front of the mirror 28 is essentially parallel with the printed circuit board 12. Thus, the printed circuit board 12 will not obscure the view of the imaging system 15. The optical axis of the imaging system 13 in front of the mirror 28 may be somewhat inclined, typically by less than about  $15^\circ$ , preferably by less than about  $10^\circ$ , and most preferably by about  $3^\circ$ - $8^\circ$ , to the longitudinal axis of the ink cartridge 8 so that the imaging system 15 will view an area of the writing surface 14 close to the pen point 9.

The sensor boresight unit 26 further comprises a lens 29 in front of the mirror 28 in the optical path of the radiation. The lens 29 is arranged to focus radiation from the writing surface 14 onto the radiation sensor 24 via the mirror 28. The lens 29 is arranged in the sensor boresight unit 26 such that the distance between the lens 29 and the sensor 24 is shorter than the distance between the lens 29 and the writing surface 14, whereby the imaged area on the writing surface 14 is increased. The imaged area should be sufficiently reduced in size so that a sufficient area of the writing surface 14 is imaged on the radiation sensor 24 to determine the position of the pen point 9. The imaged area may, however, not be reduced to such a degree that the smallest required resolution of the image is imaged onto an area that is smaller than a pixel size in the radiation sensor 24.

The sensor boresight unit 26 also comprises an aperture stop 30. The aperture stop 30 reduces the amount of radiation passed towards the radiation sensor 24. If an opening of the aperture stop 30 is increased, more radiation is passed towards the radiation sensor 24, but the depth of field of the imaging system 15 is simultaneously decreased.

In one embodiment, shown in Fig. 10, the lens and the mirror are implemented in one optical component 31. The optical component 31 is a solid optics component denoted herein as an imaging prism. The imaging prism 31 may be produced of a plastics material, such as polymethylmethacrylate (PMMA), polycarbonate Zeonex®, polystyrene, nylon, or polysulfone. The imaging prism 31 has a base 32 to be attached to the printed circuit board 12, e.g. by gluing, snapping or ultrasonic welding. The sensor pocket 27 is arranged in the base 32. The surface inside the sensor pocket 27 of the imaging prism 31 may be planar or slightly curved and forms an exit surface 33 for radiation towards the radiation sensor 24. The imaging prism 31 further has a mirror surface 34 which is arranged above the sensor pocket 27 and inclined in relation to the base 32. The mirror surface 34 is metallized on the outside for providing a reflective surface. Thus, the radiation incident on the mirror surface 34 from within the imaging prism 31 will be reflected in the mirror surface 34. Alternatively, a glass mirror is glued to the imaging prism 31 by means of an optical glue. The imaging prism 31 also has an essentially tubular part 35 which extends from the mirror surface 34 and is at least partly supported by the base 32. A longitudinal axis of the tubular part 35 extending from the mirror surface 34, which axis also forms an optical axis of the imaging system 15, is slightly inclined towards a plane, in which the base 32 is located. This provides that the optical axis is tilted to the longitudinal axis of the ink cartridge 8, whereby the imaging system 15 may image an area close to the pen point 9. The end of the tubular part 35 farthest away from the mirror surface 34 extends beyond the base 32. This end forms an entrance surface 36 of the imaging prism 31. The entrance surface 36 is curved to form the lens and is arranged to receive radiation from the object plane.

All surfaces of the imaging prism 31 except the entrance surface 36 and the exit surface 33, and optionally the mirror surface 34, may be covered with a radiation-transfer material. The radiation-transfer material has an index of refraction that is sufficiently matched to the index of refraction of the imaging prism material, such that the major part of any radiation impinging on these covered surfaces is transmitted into the radiation-transfer material instead of being reflected back into the imaging prism. The radiation-transfer material may also be selected to absorb the relevant wavelengths, typically with an absorbance of at least 0.5, to prevent the transferred radiation from spreading within the pen. The provision of a radiation-transfer material on the outside of the imaging prism prevents stray radiation from reaching the radiation sensor. Since an effective prevention of internal reflections in the imaging prism is provided, the surfaces of the imaging prism may be arranged close to the desired optical path in the imaging prism. Thus, the imaging prism may have a small size. The radiation-transfer material may also be selected to prevent radiation from entering the imaging prism through other surfaces than the entrance surface. In one preferred embodiment, the radiation-transfer material is a black paint.

Further, there is provided a notch 37 in the base 32. This notch 37 forms a barrier in front of the radiation sensor 24 as seen from the entrance surface 36 and provides that radiation is not allowed to impinge on the radiation sensor 24 directly from the entrance surface 36 without interacting with the mirror surface 34.

In this embodiment, the sensor boresight unit 26 consists of the imaging prism 31 and an aperture stop 38. The aperture stop 38 may be implemented as a cap to be mounted over the tubular part 35 of the imaging prism 31

at the entrance surface 36. The aperture stop 38 has an opening 39 to be arranged in front of the entrance surface 36 to allow radiation into the prism 31. The aperture stop 38 may be formed in plastics material and be glued or snapped onto the prism 31. The aperture stop 38 may alternatively be provided by masking a part of the entrance surface 36 that should not transmit radiation, e.g. with the radiation-transfer material used for the other surfaces of the imaging prism 31.

10 In another embodiment, shown in Fig. 11, the sensor boresight unit 26 is implemented as a housing 40 containing the needed optical components. Radiation is propagated through the housing 40 in a channel 41 formed in the housing 40. The housing 40 has essentially the same shape as the imaging prism 31 and thus a similar optical path is formed within the housing 40. A base 42 of the housing 40 may have a large surface towards the printed circuit board 12. Further, the housing 40 may be formed in a material optimal for strongly attaching the housing 40 to the printed circuit board 12 by e.g. gluing. The housing 40 has an opening 43 in the base 42 forming the sensor pocket, which is open into the channel 41.

25 A mirror 44 is attached by e.g. gluing covering an opening in the housing 40 above the opening 43 in the base 42. The housing 40 may provide slots for receiving the mirror 44 and defining the position of the mirror 44. The housing 40 further provides a tubular part 45 of the channel 41 extending from the mirror 44. The housing 40 may have a thick base wall which forms the lower inside surface of the channel 41. At an end of the tubular part 45, inside walls of the housing 40 may have radial protrusions 46 for reducing the diameter of the channel 41 and effectively forming an aperture stop 47. The aperture stop 47 may be arranged a short portion into the channel 41 of the housing 40. The housing 40 further comprises an outer opening for receiving radiation from

the writing surface 14. A lens 48 may be attached in the housing 40 in front of the aperture stop 47, for example by means of gluing, crush ribs, ultrasonic welding, form fitting, snap fitting, etc.

5       The aperture stop may alternatively be arranged as a separate component, which is inserted into and attached to the housing 40. The aperture stop may as a further alternative be provided by means of a cap that is arranged over the front end of the housing 40. Such a cap  
10 may also include the lens 48.

      The housing 40 may be formed in a radiation-absorbing material for absorbing stray radiation. The inner surface of the housing 40 may also or alternatively be coated with a radiation-absorbing material. The inner  
15 surface of the housing 40 may be roughed or textured to reduce specular reflections. Alternatively or additionally, the inner surface of the housing 40 may have one or more surfaces that directs specular reflections away from the opening 43. The inside walls of  
20 the protrusions 46 forming the aperture stop 47, i.e. the walls closest to the mirror 44, may be tapered such that the protrusion 46 is thicker closer to the wall of the housing 40. Thus, reflections in these protrusion walls are steered into the walls of the housing 40. These  
25 protrusion walls may also be roughed or textured.

      When decoding a position-coding pattern on the writing surface 14, the distance  $D$  is important to relate the position of the pen stroke to the physical pen stroke on the writing surface 14. For instance, the processor 16  
30 can be arranged to calculate, based on one image, the spatial orientation of the pen 1 and a position, and, knowing the position, the spatial orientation and the distance  $D$ , to calculate a writing position, i.e. the position of the contact point  $P$ . Deviations from the  
35 nominal value of the distance  $D$  thus introduce systematic errors in the calculated writing positions.

The imaging system 15 is, however, preferably arranged to image an area of the writing surface 14 that is partly obscured by a tip of the ink cartridge 8. The tip consists of a ball held by a cone leading up to the cylindrical body of the ink cartridge 8. The edge between the cone and the cylindrical body of the ink cartridge 8 may then form an obscuration edge in the recorded images, although any other part of the tip may form the obscuration edge. The obscuration edge may be nominally placed in the image such that the tolerance chain of components of the pen 1 keeps the obscuration edge placed within the image. Thus, the obscuration edge may always be detectable in the images. This implies that the position of the obscuration edge in the recorded images could be used for calibrating the distance D for individual pens. It should be noted that the distance D is a vector in the reference plane and the calibration is therefore made in two dimensions.

The position-coding pattern on the writing surface 14 is suitably printed to be visible in the near infrared wavelength band. Further, the ink from the pen 1 may be chosen in order not to be visible in the near infrared wavelength band such that it will not interfere with the information of the position-coding pattern. In order not to image wavelengths in the visible region, an infrared filter 49 (Fig. 4) may be arranged in front of the lens 29 of the imaging system 15. The infrared filter 49 may absorb all wavelengths shorter than the near infrared wavelengths. The infrared filter 49 will then absorb undesired radiation from sunlight and external illumination.

The function of an infrared filter may be implemented anywhere in the imaging system 15. Thus, the infrared filter may alternatively be arranged in the housing 40 or be integrated in the imaging prism 31 by the material of the imaging prism 31 being highly absorptive to wavelengths shorter than the near infrared

wavelengths. By placing the infrared filter 49 in front of the lens 29 of the imaging system 15, the infrared filter 49 may also serve as a protective window.

Referring now to Fig. 12, the irradiating system 13 comprises a radiation source 50, which is arranged to emit radiation. The source 50 is typically a light-emitting diode (LED) or a laser diode that emits radiation in a limited wavelength band. The source 50 may be mounted in a through hole 51 on the printed circuit board 12 and be electrically connected thereto. The irradiating system 13 further comprises a radiation guide 52 for directing the radiation to the desired area on the writing surface 14. The radiation guide 52 may be formed in one piece of a plastic material, such as PMMA, polycarbonate, Zeonex®, polystyrene, nylon, or polysulfone.

The radiation guide 52 is mounted to the printed circuit board 12 over the through hole 51. The radiation guide 52 comprises a base surface 53 which may be attached to the printed circuit board 12 by e.g. gluing. The base surface 53 may comprise a flange 54 for providing a larger attachment area to the printed circuit board 12. The flange 54 is arranged merely for securing attachment of the radiation guide 52 and not for transmitting radiation from the source 50. The flange 54 ensures secure attachment of the radiation guide 52 such that the radiation guide 52 will not part from the printed circuit board 12 if the pen is exposed to a mechanical shock. The radiation guide 52 may further comprise guidance pins or holes (not shown) for controlling the positioning of the radiation guide 52 in relation to the printed circuit board 12 and/or the adjacent sensor boresight unit 26 of the imaging system 15.

The radiation guide 52 comprises a source receiving pocket 55, which is to be arranged over the through hole 51 in the printed circuit board 12. The pocket 55 has a

planar entrance surface 56 at its base and radiation from the source 50 enters the radiation guide 52 through this entrance surface 56.

The radiation guide 52 further has a mirror surface 57 which is arranged above the source receiving pocket 55 and inclined in relation to the base surface 53. The mirror surface 57 is metallized on the outside to provide a reflective surface. The radiation is redirected essentially 90° in the mirror surface 57, so that the optical axis of the irradiating system 13 in the optical path after the mirror surface 57 is essentially parallel with the printed circuit board 12. Thus, the printed circuit board 12 will not obscure the irradiating of the writing surface 14 by means of the irradiating system 13. The optical axis of the irradiating system 13 after the mirror surface 57 may be somewhat inclined, typically by less than about 15°, and preferably by less than about 10°, to the longitudinal axis of the ink cartridge 8 so that the irradiating system 13 will irradiate an area of the writing surface 14 close to the pen point 9.

The radiation guide 52 forms an essentially tubular shape for guiding the radiation after it has been reflected by the mirror surface 57. The radiation exits the radiation guide 52 through an exit surface 58, which is provided at an end of the tubular shape. All surfaces except the entrance surface 56 and the exit surface 58 may be metallized, whereby radiation is controlled to exit only through the exit surface 58. Radiation impinging on other walls will thus be reflected back into the radiation guide 52.

The tubular shape of the radiation guide 52 has an essentially constant cross-section. By varying the cross-section of the tubular shape, the shape of the irradiated area may be changed. Further, the longer the tubular shape is, the more uniform the emitted radiation of the radiation guide 52 will be. However, it may be sufficient to keep the tubular shape so short that most of the

emitted radiation will only have been reflected once before exiting the radiation guide 52. The minimum width of the cross-section of the tubular shape in a direction parallel to the printed circuit board surface is mainly  
5 determined by the size of the source receiving pocket 55. The cross-section of the tubular shape should be kept as small as possible to keep the radial size of the pen 1 down, while the emitted radiation should irradiate a sufficiently large area. To this end, the tubular shape  
10 of the radiation guide may be designed with an asymmetrical cross-section.

As illustrated in Fig. 11, the exit surface 58 of the radiation guide 52 is angled to a longitudinal axis of the tubular shape of the radiation guide 52 so that  
15 the radiation is redirected in the exit surface 58 towards the writing surface 14 to be irradiated. The redirection of radiation in the exit surface 58 implies that an optical axis of the irradiating system 13 beyond the radiation guide 52 converges with the optical axis of  
20 the imaging system 15 towards the writing surface 14. The redirection of the optical axis of the irradiating system 13 in the exit surface 58 is needed, since the optical axis of the irradiating system 13 in the tubular shape of the radiation guide 52 is essentially parallel to the  
25 optical axis of the imaging system 15 in the tubular part 35 of the imaging prism 31 or in the channel 41 of the housing 40.

The exit surface 58 of the radiation guide 52 may be planar. Alternatively, the exit surface 58 may be curved  
30 to provide a surface power for controlling the size of the irradiated area.

Since the source 50 and the radiation sensor 24 are arranged close to each other on the printed circuit board 12, there is a need for preventing leakage of radiation  
35 directly from the source 50 to the radiation sensor 24. Some features of the optical system 11 mentioned above serve to hinder such leakage. Thus, the radiation guide

52 of the irradiating system 13 is metallized for preventing radiation to escape from other surfaces than the exit surface 58. Further, the imaging prism 31 or the housing 40 may be painted or coated by a non-transmitting material to prevent radiation from entering the imaging prism 31 or housing 40 through other surfaces than the entrance surface.

Further, the irradiation and imaging is performed in the near infrared wavelength band. If the printed circuit board 12 is essentially transparent in this wavelength band, then it is important to ensure that radiation is not transmitted through the printed circuit board 12 from the source 50 to the radiation sensor 24. This may be especially important, since the radiation sensor 24 may be transparent from its backside and may thus detect radiation that enters from beneath the radiation sensor 24. Thus, the through hole 51 in the printed circuit board 12 may be metallized to minimize direct leakage of radiation from the source 50 into the printed circuit board 12. Further, one or more layers of copper may be arranged in the printed circuit board 12 to reduce radiation propagation in the printed circuit board. Further, a non-transmitting glue may be used in attaching the imaging prism 31 or the housing 41 to the printed circuit board 12. Thereby, radiation is prevented from propagating in the interface between the imaging prism 31 or the housing 40 and the printed circuit board 12.

Moreover, where the window 49 is arranged in front of the lens 29 of the imaging system, there is a risk of reflections in the window 49 of the emitted radiation from the radiation guide 52 being directed into the entrance surface of the imaging system 15. The imaging system 15 should be arranged to receive radiation that has passed the window 49 through an area of the window 49 that does not coincide with the area of the window 49 that is irradiated by the irradiating system 13. However, to further reduce risks of detecting radiation that is

reflected in the window 49, the window 49 may be anti-reflection coated on one or both surfaces. Further, the window 49 may be angled such that reflections from the emitted radiation are deflected away from the imaging system 15.

It should be emphasized that the preferred embodiments described herein are in no way limiting and that many alternative embodiments are possible within the scope of protection defined by the appended claims.

For instance, the above writing means can be, instead of an ink cartridge, a fountain pen unit, a pencil unit, a felt pen unit, a magnetic head for cooperation with a selectively magnetisable base, a heating head for cooperation with a heat sensitive base, an electronically controlled ink jet unit, a miniaturized laser printer unit etc. It may even be conceivable that the writing means will not leave any trace of its path along the writing surface 14, and the writing that is detected by the imaging system and the image processor will not be visible to the eye. In this case, the writing means may be e.g. a stylus or a pointed bar or rod.

Further, in the above description, a lens is described in several different occasions. In such cases, the lens may be implemented as a single optics component exhibiting a lens function or alternatively as a lens package.

Likewise, the above-mentioned printed circuit board (PCB) is intended to encompass other equivalent structures, such as thick film hybrids of metal or ceramic material.

In an alternative embodiment, the sensor boresight unit is supported by the PCB without being directly attached thereto. More specifically, the PCB with the radiation sensor rests on one side of the carrier, with at least one through hole of the PCB being aligned with a corresponding receiving bore in the carrier. The boresight unit, which has at least one protruding guiding

pin, is mounted onto the PCB with the guiding pin being snugly fit into the through hole and the receiving bore, to thereby adequately line up the boresight unit, the radiation sensor, and the carrier. As an alternative or  
5 addition, there may be provided at least one corresponding guiding pin on the carrier for cooperation with a receiving bore on the boresight unit, via a through hole in the PCB. Further, the base of the boresight unit has at least one control surface for  
10 abutment on at least one corresponding control surface on the PCB and/or the radiation sensor. As mounted, the boresight unit is pressed against the PCB, to thereby minimize any variations in the position of the boresight unit in the normal direction of the radiation sensor. The  
15 boresight unit may be fixed to the carrier by means of external clamping fixtures and/or by means of welding, gluing, form fitting, press fitting, snap fitting, etc, for example via the guiding pins. Alternatively, similar means may be used to fix the boresight unit to the PCB,  
20 and to fix the PCB to the carrier.

In yet another alternative embodiment, the boresight unit is arranged to be supported directly by the carrier instead of by the PCB. Thus, the carrier comprises means for supporting the boresight unit, as well as means for  
25 supporting the PCB. These means may be implemented as cooperating pins and bores, form fits, snap fits, welding surfaces, gluing surfaces, etc.

In all of the above embodiments, the radiation source of the irradiating system may be mounted in any  
30 position directly on the carrier, on the PCB or on another component of the modular unit. However, the radiation source should preferably be kept in a close relationship to the imaging system, so as to minimize the effects of the pen orientation on the interrelationship  
35 between the imaged and irradiated areas on the writing surface. In one example, the radiation source is mounted in a holder on an outer surface of the sensor boresight

unit, which in turn is supported by the PCB. Thus, a short tolerance chain and, consequently, a well-defined relationship is obtained between the irradiating system and the imaging system. Further, by attaching the radiation source to the boresight unit, the radiation source may be brought closer to the object plane of the imaging system so that the radiation guide may be omitted. Also, by combining the optical system and the PCB with the carrier, the above advantages obtained in enabling a test of a modular unit before final assembly of an electronic pen are maintained.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10

CLAIMS

1. An optical system, comprising:
  - an irradiating system which has an optical axis
  - 5 within said irradiating system and includes a radiation source, and
  - an imaging system which has an optical axis within said imaging system and includes a two-dimensional radiation sensor, said imaging system being arranged to
  - 10 provide an image of an object being irradiated by said irradiating system,
  - wherein said radiation source and said two-dimensional radiation sensor are mounted on a common substrate,
  - 15 c h a r a c t e r i z e d in that said optical axis of the irradiating system and said optical axis of the imaging system are non-coinciding within said systems.
2. The optical system according to claim 1, wherein the irradiating system is arranged to redirect radiation
- 20 from the radiation source, and the imaging system is arranged to redirect radiation from the irradiated object towards the radiation detector.
3. The optical system according to claim 1 or 2, wherein the optical axis within the irradiating system
- 25 and the optical axis within the imaging system run essentially in parallel to each other.
4. The optical system according to claim 3, wherein the optical axis within the irradiating system and the optical axis within the imaging system run essentially in
- 30 parallel to the common substrate.
5. The optical system according to claim 4, wherein the optical axis within the irradiating system and the optical axis within the imaging system define a plane which is essentially parallel to and at a distance from
- 35 the common substrate.
6. The optical system according to any one of the preceding claims, wherein the irradiating system further

comprises a radiation guide for guiding radiation from the radiation source towards the object.

7. The optical system according to claim 6, wherein the radiation guide presents non-exit surfaces at least  
5 part of which may be metallized.

8. The optical system according to claim 6 or 7, wherein the radiation guide presents an inclined radiation-redirecting exit surface.

9. The optical system according to any one of claims  
10 6-8, wherein the radiation guide is mounted on the common substrate.

10. The optical system according to any one of the preceding claims, wherein the imaging system further comprises a sensor boresight unit for controlling a  
15 spatial origin of radiation transmitted towards the radiation sensor.

11. The optical system according to claim 10, wherein the sensor boresight unit is mounted on the common substrate.

20 12. The optical system according to claim 10 or 11, wherein the sensor boresight unit comprises a mirror for redirecting radiation from the object towards the radiation sensor.

13. The optical system according to any one of  
25 claims 10-12, wherein the sensor boresight unit comprises a lens for creating an image of adequate image quality on an image plane of the radiation sensor.

14. The optical system according to claim 10 or 11,  
30 wherein the sensor boresight unit comprises an optical component, which is arranged to transmit radiation towards the radiation sensor, and wherein the optical component comprises a mirror for redirecting radiation from the object towards the radiation sensor, and a lens for creating an image of adequate image quality on an  
35 image plane of the radiation sensor.

15. The optical system according to claim 14, wherein the sensor boresight unit further comprises an

aperture stop, which is arranged in front of the optical component.

16. The optical system according to claim 14 or 15, wherein the optical component presents outer surfaces at least part of which are covered with a material arranged to reduce internal reflections in said outer surfaces.

17. The optical system according to claim 10 or 11, wherein the sensor boresight unit comprises a housing, providing an internal channel, which is arranged to transmit radiation towards the radiation sensor, wherein a mirror for redirecting radiation from the object towards the radiation sensor and a lens for creating an image of adequate image quality on an image plane of the radiation sensor are mounted in the housing.

18. The optical system according to claim 17, wherein the guide unit further comprises an aperture stop arranged in said housing.

19. The optical system according to claim 17 or 18, wherein the housing presents inside surfaces at least part of which are arranged to reduce specular reflection of radiation.

20. An analysis system, comprising an optical system according to any one of the preceding claims, a printed circuit board implementing said common substrate, and an image processor for analysing image information received from the radiation sensor, wherein the optical system is supported by and the image processor is mounted on said printed circuit board.

21. A modular unit for an electronic pen having a writing means, said modular unit comprising a carrier, and an analysis system according to claim 20 being mounted on the carrier, said carrier having means for receiving said writing means in order to position the writing means in relation to the analysis system within the electronic pen.

22. The modular unit according to claim 21, wherein the modular unit has a dimension allowing the modular unit to be mounted inside the electronic pen.

23. The modular unit according to claim 21 or 22, wherein the printed circuit board of the analysis system is mounted on the carrier for mounting the analysis system on the carrier.

24. The modular unit according to any one of claims 21-23, wherein the carrier has an elongate shape which extends, when the modular unit is comprised in an electronic pen, in a longitudinal direction of the electronic pen.

25. The modular unit according to any one of claims 21-24, further comprising a pressure sensor which is mounted on the carrier.

26. The modular unit according to any one of claims 21-25, further comprising means for forming attachment to an outer shell part of the electronic pen.

27. The modular unit according to any one of claims 21-26, further comprising a vibrator unit which is mounted on the carrier.

28. The modular unit according to any one of claims 21-27, further comprising a wavelength filter mounted on the carrier.

29. A sensor boresight unit for transmitting radiation from an object to a radiation sensor, said sensor boresight unit comprising:

a housing, which provides an internal channel that changes direction at a turn within said housing and further provides a radiation entrance end and a radiation exit end of said channel,

a lens, which is mounted in the internal channel at said radiation entrance end of said housing, and

a mirror, which is mounted in the housing at said turn of the internal channel for redirecting radiation along the change of direction of the internal channel.

30. An optical component for transmitting radiation from an object to a radiation sensor, said optical component being formed by a solid body defining a radiation path within the body, said solid body
- 5 comprising:
- a radiation entrance surface for receiving radiation into said radiation path, said entrance surface being curved for forming a lens,
  - a radiation exit surface,
- 10 a tubular part for transmitting radiation in the radiation path along a longitudinal axis of the tubular part, and
- a mirror surface at an end of the tubular part opposite the entrance surface, wherein a normal of the
- 15 mirror surface is slanted to the longitudinal axis of the tubular part such that the radiation path is redirected in the mirror surface towards the radiation exit surface of the solid body.
31. A modular unit for an electronic pen having a
- 20 writing means, said modular unit comprising:
- a carrier,
  - a printed circuit board, which is mounted on the carrier, and
  - an optical system, which is mounted on the carrier,
- 25 said optical system comprising an irradiating system including a radiation source and an imaging system including a two-dimensional radiation sensor, the imaging system being arranged to provide an image of an object irradiated by said irradiating system,
- 30 wherein said carrier has means for receiving said writing means in order to position the writing means in relation to the optical system within the electronic pen.
32. The modular unit according to claim 31, wherein the imaging system comprises a sensor boresight unit for
- 35 controlling a spatial origin of radiation transmitted towards the radiation sensor.

33. The modular unit according to claim 32, wherein the sensor boresight unit is supported by the printed circuit board.

5 34. The modular unit according to claims 32 or 33, wherein the radiation source of the irradiating system is carried by the sensor boresight unit of the imaging system.

FIG. 13

ABSTRACT

An optical system is arranged to irradiate an object and to transmit an image of the object to an image plane.

5 The optical system comprises an irradiating system comprising a radiation source, and an imaging system comprising a two-dimensional radiation detector. The radiation source and said radiation detector are arranged in such relationship to each other as to be mountable on

10 a mutual substrate. An optical axis in the components of the irradiating system is separate from an optical axis in the components of the imaging system.

15 The optical system may be arranged as a part of an analysis system and further as a part of a modular unit for an electronic pen.

Elected for publication: Fig. 2

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
217

1/5

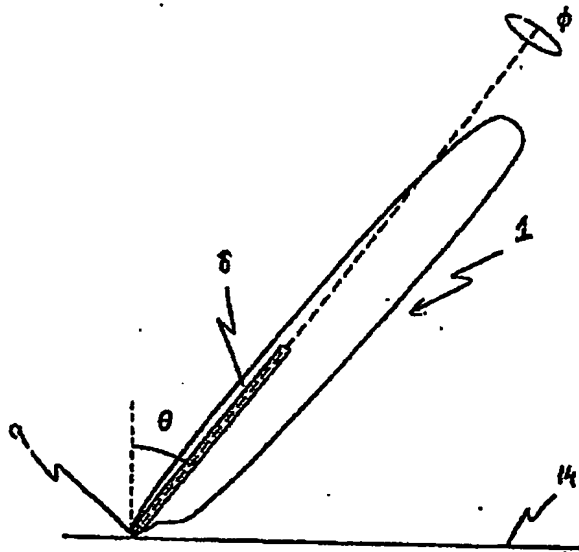


Fig 1a

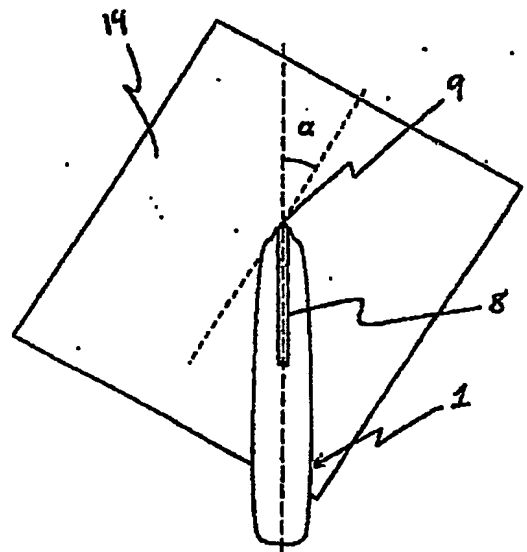


Fig 1b

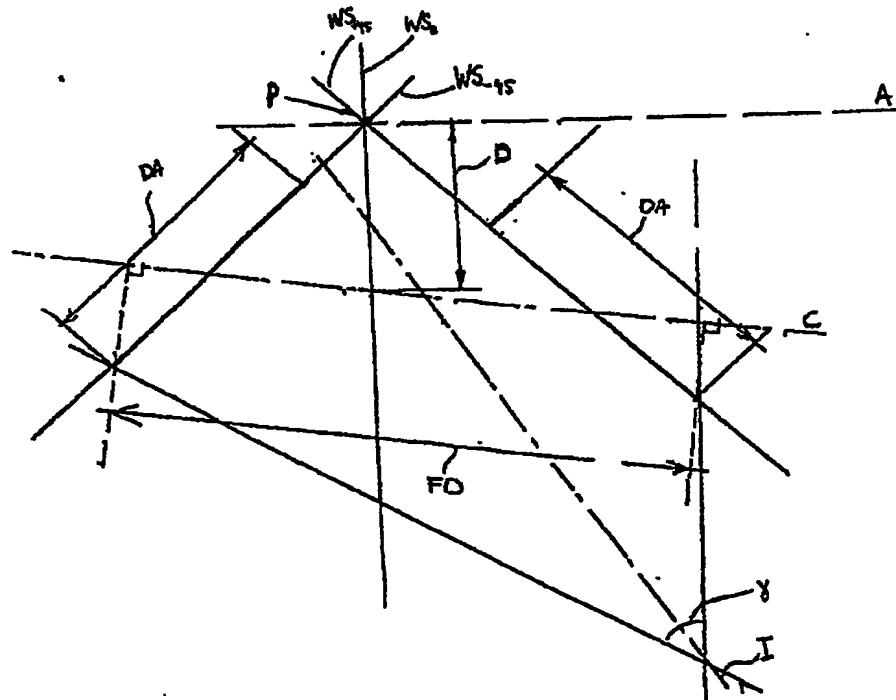


Fig 2

2/5

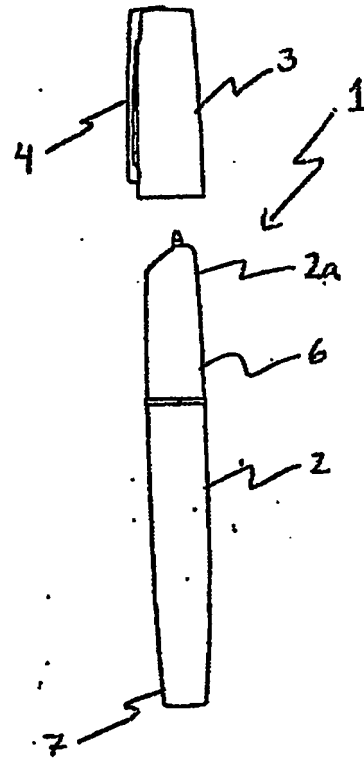


Fig 3

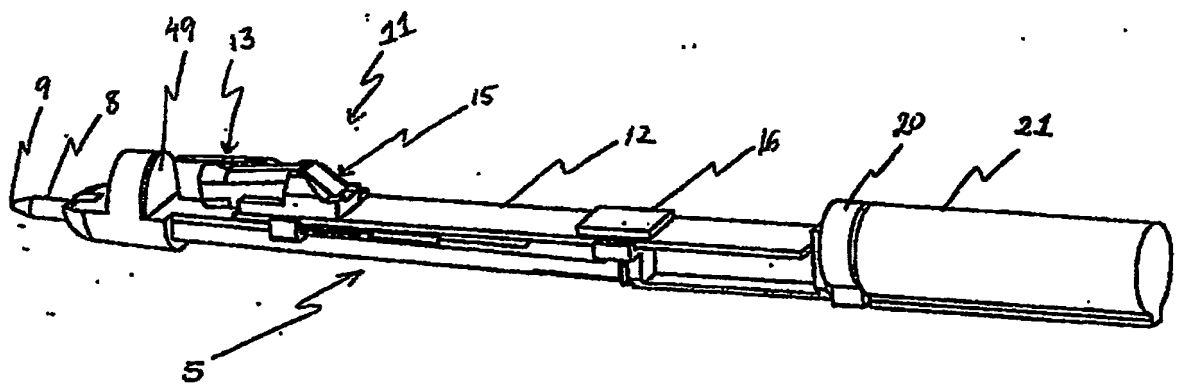


Fig 4

3/5

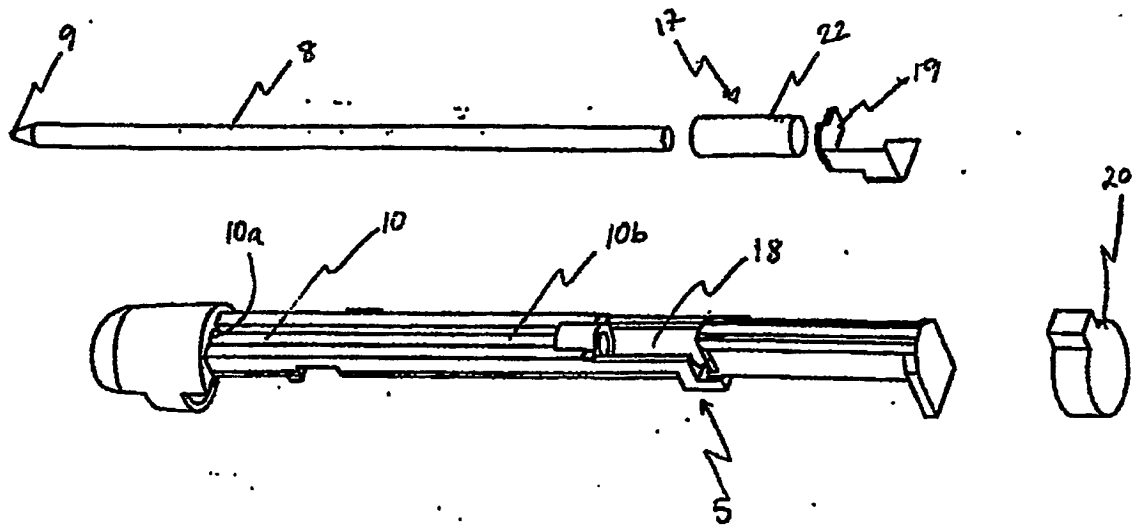


Fig 5

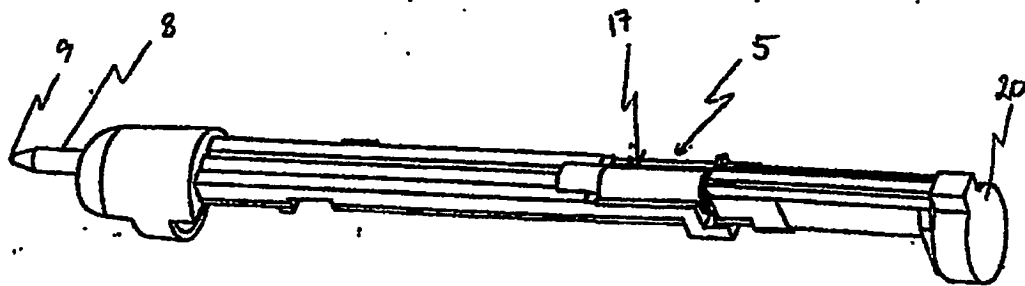


Fig 6



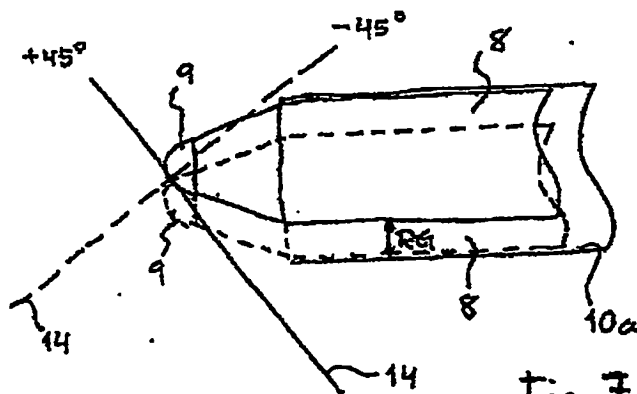


Fig 7

4/5

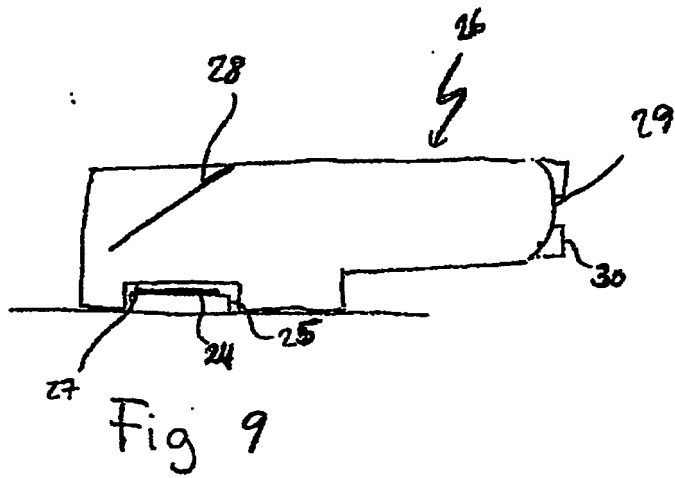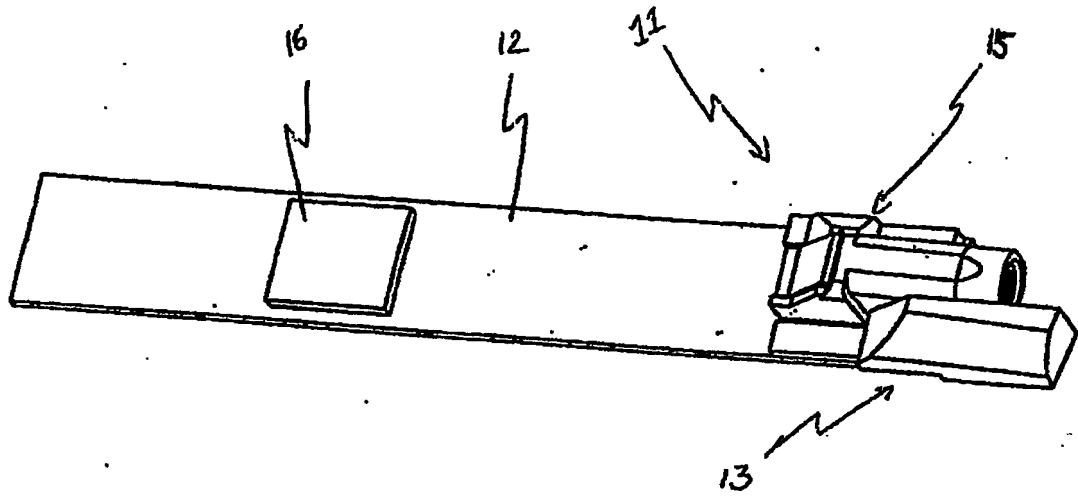

5/5

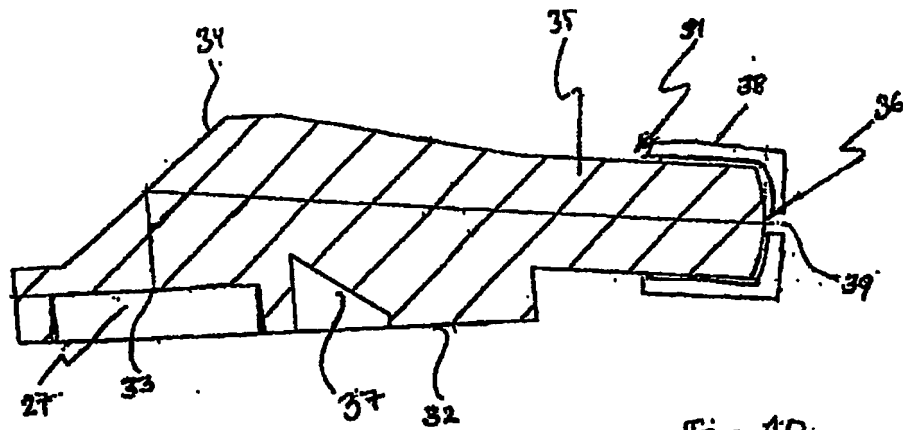


Fig 10

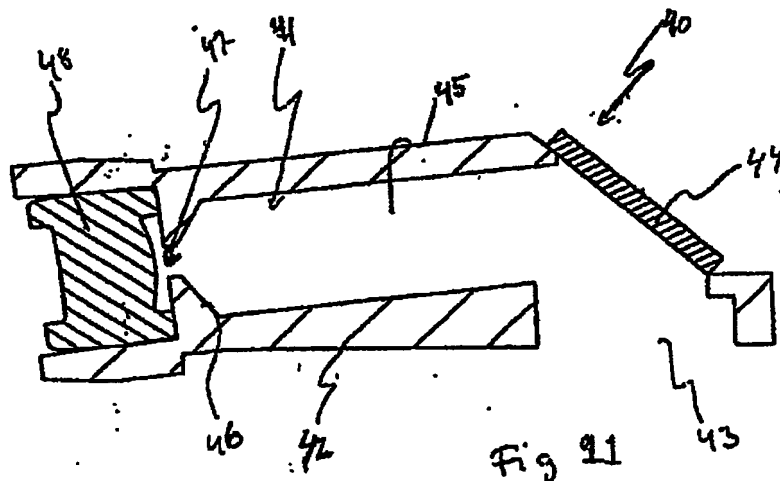


Fig 11

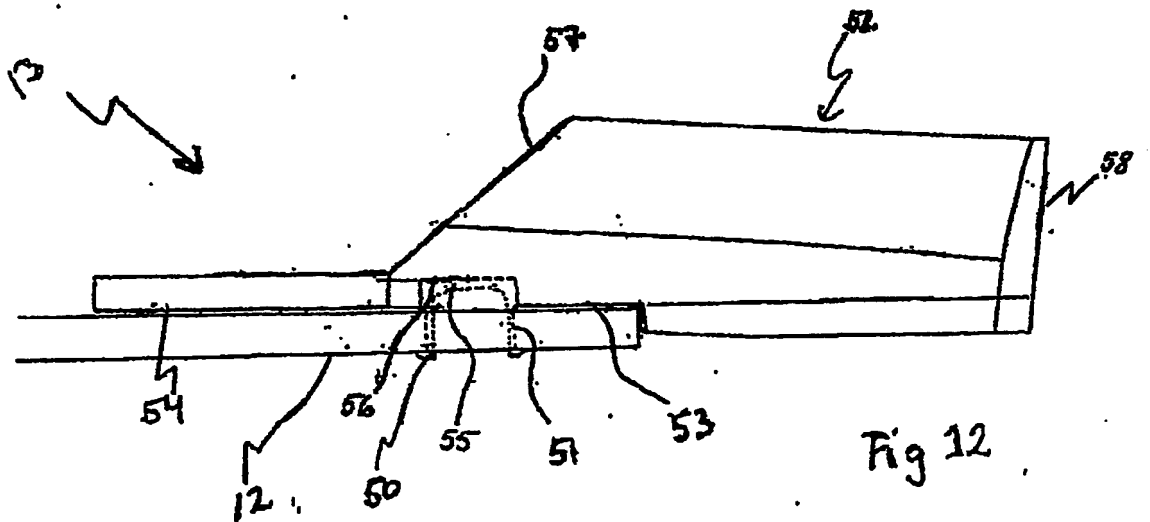


Fig 12

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/SE04/001864

International filing date: 15 December 2004 (15.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: SE  
Number: 0303351-1  
Filing date: 15 December 2003 (15.12.2003)

Date of receipt at the International Bureau: 07 January 2005 (07.01.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**